


2005 AUGUST BLOCK  
UNDERGROUND RAILROAD  
9" Finished

for each block cut:  
2 light squares 3-7/8"  
2 dark squares 3-7/8"  
1 light strip 2" x 21"  
1 medium strip 2" x 21"

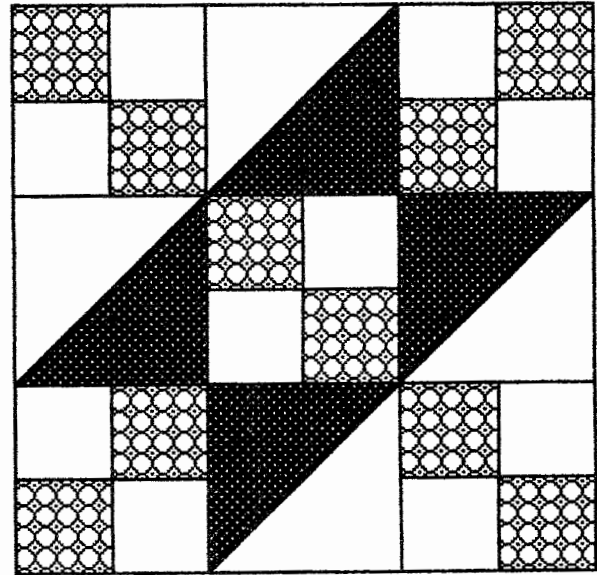

Layer light and medium strips, right sides together (RST). Sew 1/4" seam along long side and press open toward dark, sub cut into 10 - 2" pieces. Sew these together into pairs to make the five 4- patch units.

Layer light and dark squares RST and draw a diagonal line from corner to corner, sew 1/4" on each side of line, cut on line to make half square triangle units, press toward